


Sunmodule®

SolarWorld Module SW 165/175 mono/P

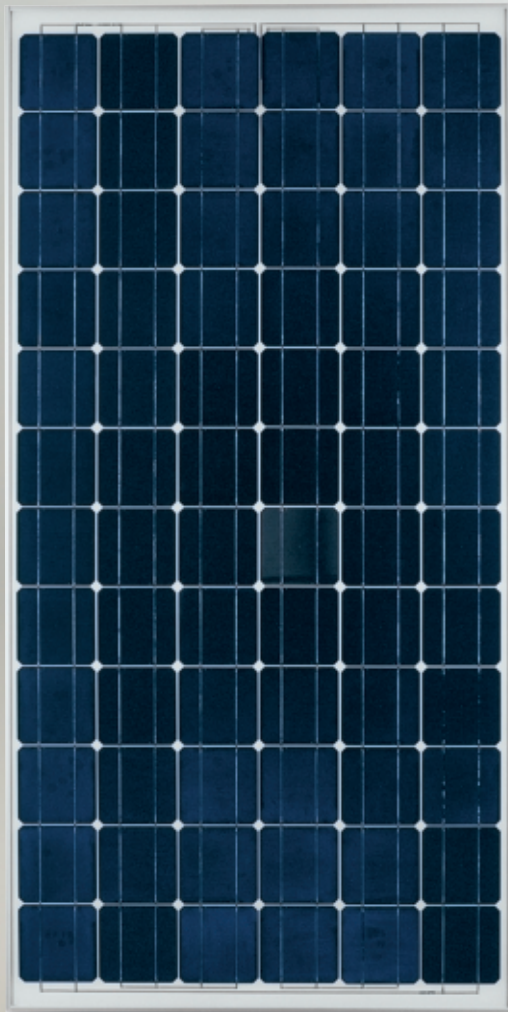

The Sunmodule® SW 165/175 mono/P by SolarWorld offers an innovative module concept.

The monocrystalline 5" cells lie behind a hardened-glass glazing and are embedded in transparent EVA (ethylene-vinyl-acetate). The back of the module is sealed with a very high quality Tedlar film.

This compact top-quality product represents the ideal solution for every application.

	Module
Length:	63.9 inch
Width:	32.0 inch
Height:	1.6 inch
Frame:	Aluminium
Weight:	40 Lbs.

Edition: June 2006



SolarWorld Industries America LP
4650 Adohr Lane
P.O. Box 6032
Camarillo, CA 93011
E-Mail: service@solarworld-industries-america.com
www.solarworld-industries-america.com

SolarWorld California, Inc.
P.O. Box 81622
San Diego, CA 92138-1622
E-Mail: service@solarworld-ca.com
www.solarworld-ca.com

SolarWorld Module SW 165/175 mono/P

Performance under standard test conditions (STC)

Peak power (Pmax)	165 Wp	175 Wp
Maximum power point voltage (Vmpp)	35.0 V	35.4 V
Maximum power point current (Impp)	4.72 A	4.95 A
Open circuit voltage (Voc)	44.5 V	44.6 V
Short circuit current (Isc)	5.4 A	5.43 A

Performance at 800 W/m², NOCT, AM 1.5

Peak power (Pmax)	120 Wp	127 Wp
Maximum power point voltage (Vmpp)	31.6 V	32.2 V
Maximum power point current (Impp)	3.8 A	3.9 A
Open circuit voltage (Voc)	40.0 V	40.4 V
Short circuit current (Isc)	4.2 A	4.25 A

Minor reduction in efficiency under partial load conditions at 25°C:
at 200 W/m², 92 % (+/- 3 %) of the STC efficiency (1000 W/m²) is achieved.

Component materials

Cells per module	72
Solar cells	monocrystalline silicon
Cell dimensions	125 x 125 mm

Thermal characteristics


NOCT	45.5°C
TK Isc	0.03 %/K
TK Voc	-0.29 %/K

System design characteristics

Maximum system voltage	600 V
------------------------	-------

Rated power and maximum tolerance

Rated power	165/175 Wp +/- 3 %
Connecting sockets	IP 54
Plug	MC type 3

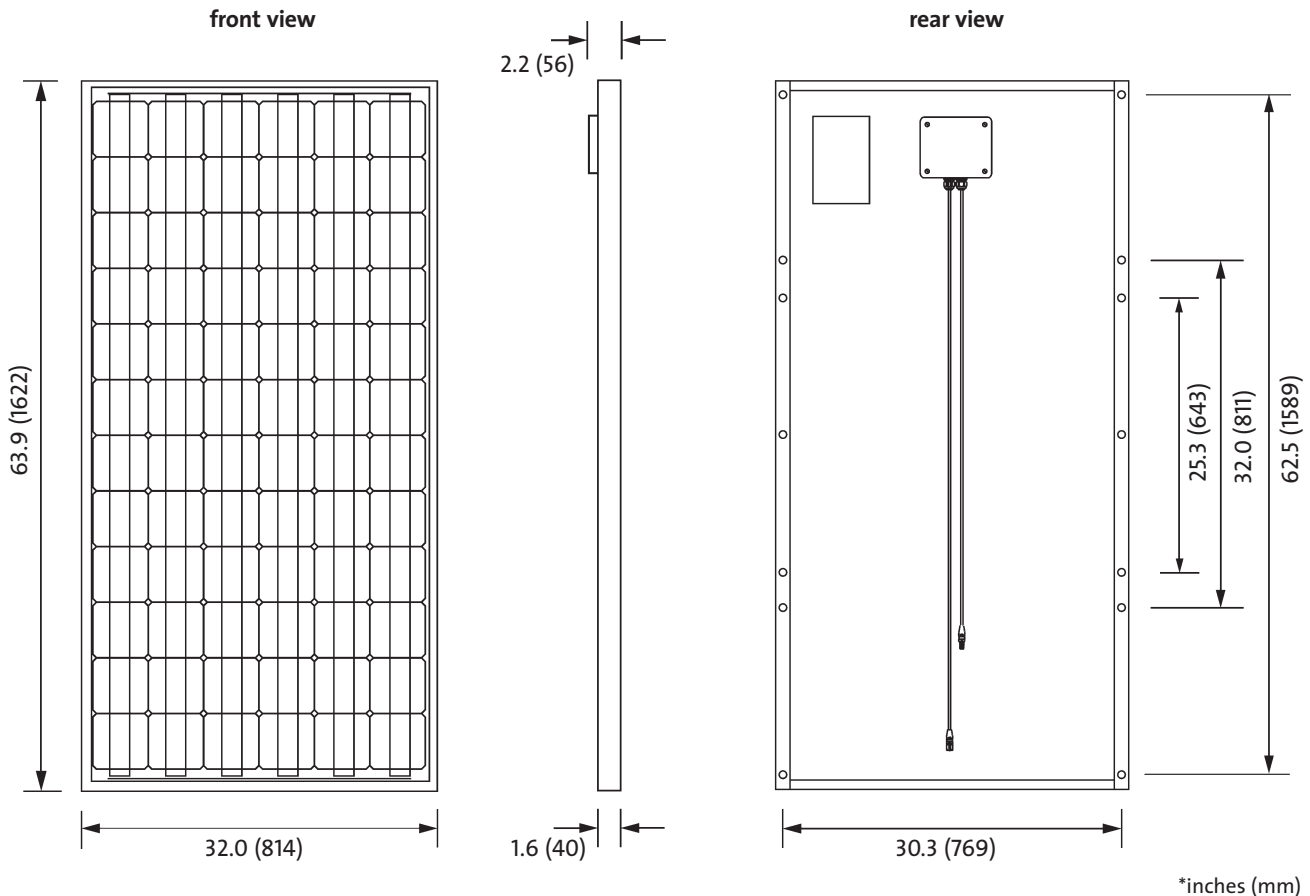

Modules formerly known as *Shell PowerMax Ultra* certified according to:



SolarWorld AG reserves the right to make specification changes without prior notice.
For detailed information on this product please consider the installation manual.